


## Actiontec® 1520 and 1524

### How to Change VPA and VCI Information

*Only experienced network administrators should perform this process.  
Qwest® DSL technical support does not support this process.*


1. Open your Web browser (Internet Explorer or Netscape). In the location or address bar, type **192.168.0.1**. Select **Enter**.

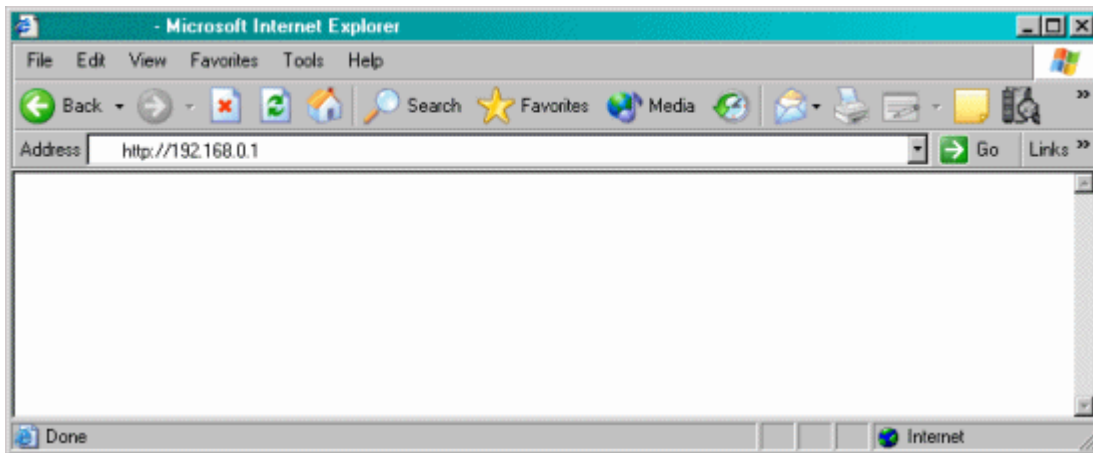


2. Select **Utilities**.



3. Select **DSL Settings**.

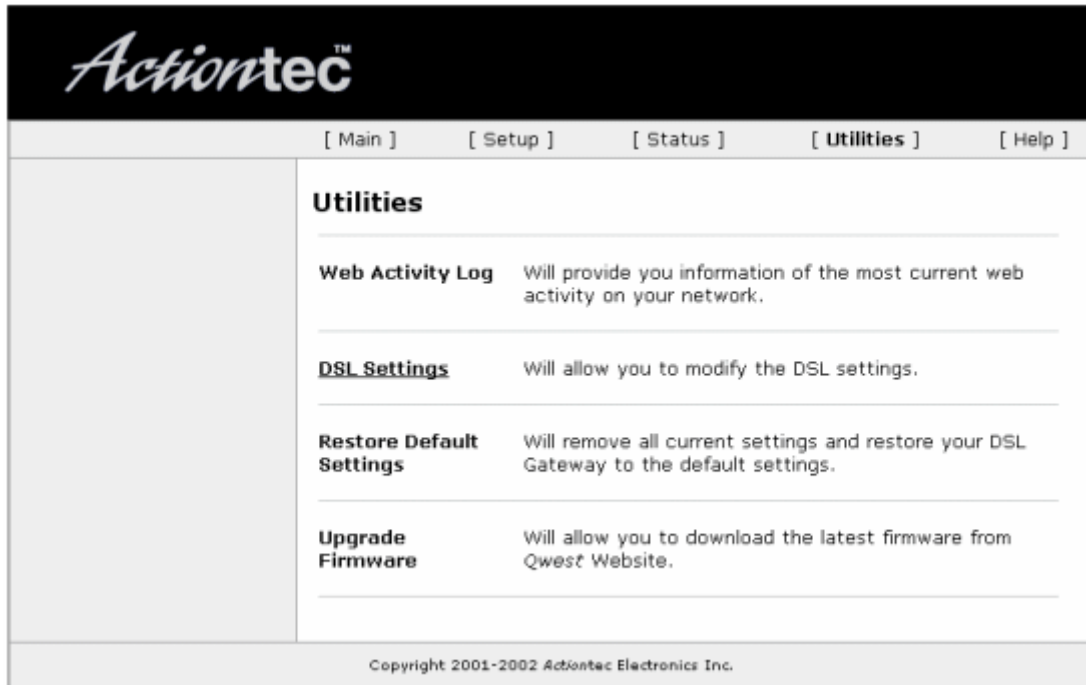

4. Change your VPI and VCI information as needed (usually 0, 32 or 0, 35) for your ISP. Select the **Save and Restart** button.

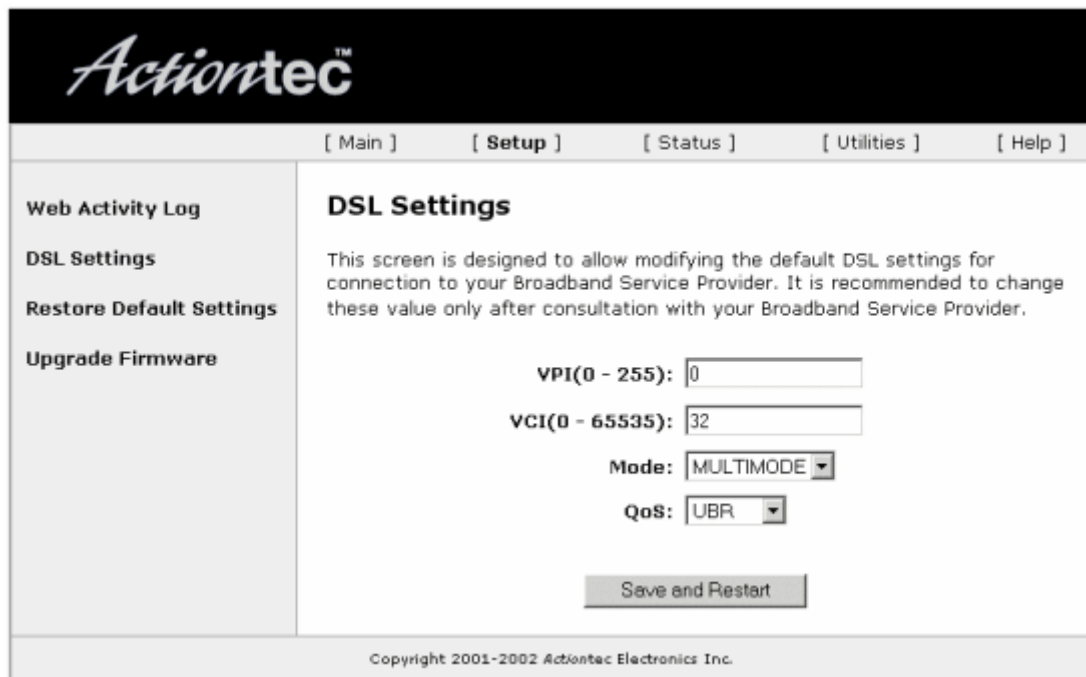

5. Select **Save and Restart**. This will reboot the router with the new setup.



6. When the Power LED stops flashing, the configuration is complete.

